

DVB-C

Digital Cable Receiver

OPTICUM HD-XC2-01

HDX2



Chipset ALI M3601

DVB-C AVC/H.264 MPEG-4 & MPEG-2 Compliant

One smart card reader with selected system:

- Conax
- Griffin
- Crypton
- DVCrypt
- Cerbercrypt
- CryptoGuard

High resolution video output - HDMI

Standard resolution video output - SCART

Supported video resolutions - 576p, 720p, 1080i, **Full HD 1080p**

Digital audio output S/PDIF - coaxial

USB connector compliant with USB 2.0 standard

Low power consumption in Stand-by mode, below 1W

Automatic Stand-By mode after 3 hours from last using receiver for power saving

Electronic Program Guide - EPG

Time Shift (video pausing, rewinding)

PVR Ready - possibility to record on external USB drive

Parental Lock for channels and Menu

Possibility of creating Favorite Lists

Subtitle support - Teletext and DVB

Teletext support

4 Digits 7-Segment Display

LCN support

Software upgrade through OTC

Size (WxHxD): 180mm x 35mm x 111mm

Weight (netto): <0,7kg

Multilingual Menu including:

Depend by order

S/PDIF
DIGITAL AUDIO OUTPUT
FOR
HOME THEATER


PVR
FOR
RECORDING
& PLAYBACK

TIME SHIFT
FOR AUTOMATIC
PAUSE & PLAY

HDMI
HIGH DEFINITION MULTIMEDIA
INTERFACE FOR
LCD AND PLASMA TV

USB 2.0
FOR
MULTIMEDIA
AND MORE...

ECOLOGY
LOW POWER
CONSUMPTION
STANDBY <1W

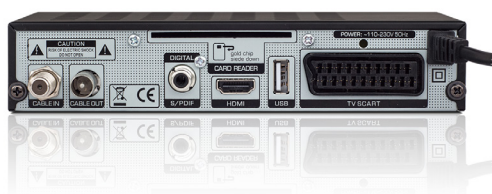

REV:01 SW 2012-07-11

Specifications are subject to change without notice.

