


DVB-S

Digital Satellite Receiver

OPTICUM HD X405p



- Chipset ALI M3606
- One slot for Smart Card in Conax system
- Support of SD / HD (MPEG2 / MPEG4 H.264), DVB-S, DVB-S2 system
- High resolution video output - HDMI, YPbPr
- Standard resolution video output - SCART, RCA
- Supported video resolutions - 576p, 720p, 1080i, **Full HD 1080p**
- Front panel display - LED 4 digit
- Digital audio output S/PDIF - coaxial
- Analog audio output - RCA stereo
- Software update by USB, RS-232C
- 0/12V out for connecting external devices
- LAN connector (Ethernet)
- USB connector compliant with USB 2.0 standard
- Low power consumption in Stand-by mode, below 1W
- Automatic Stand-By mode after 3 hours from last using receiver for power saving
- Compatible with Diseqc 1.0, 1.1, 1.2, and USALS
- Electronic Program Guide - EPG
- Multilingual Menu
- Time Shift (video pausing, rewinding)
- PVR Ready - possibility to record on external USB drive
- Blind Scan supported
- Parental Lock for channels and Menu
- Fast channels switching
- Possibility of creating own channels lists
- Possibility of creating Favourite Lists
- Sort / Group / Channels search options
- Channel Editing features - Remove, Lock, Skip, Move, Rename
- Subtitle support - Teletext and DVB
- Teletext support
- Build-in Dolby Digital decoder (downmix to stereo)
- Colour - black
- OPTICUM USB HDD supported
- Size (WxHxD) 280mm x 55mm x 235mm
- Weight (netto) <2kg

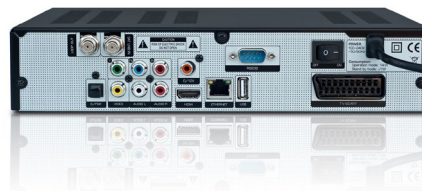

id: OX405P



Specifications are subject to change without notice.

REV:02 2012-01-10

