

DVB-S

Digital Satellite Receiver

OPTICUM HD X406p

HD
TELEVISION



Chipset ALI M3606

One slot for Smart Card in Conax system

One Slot for Common Interface Module

WiFi Ready - compliant with OPTICUM WLAN adapter

Support of SD / HD (MPEG2 / MPEG4 H.264), DVB-S, DVB-S2 system

High resolution video output - HDMI, YPbPr

Standard resolution video output - SCART, RCA

Supported video resolutions - 576p, 720p, 1080i, **Full HD 1080p**

Front panel display - LED 4 digit

Digital audio output S/PDIF - coaxial

Analog audio output - RCA stereo

Software update by USB, RS-232C

0/12V out for connecting external devices

LAN connector (Ethernet)

USB connector compliant with USB 2.0 standard

Low power consumption in Stand-by mode, below 1W

Automatic Stand-By mode after 3 hours from last using receiver for power saving

Compatible with Diseqc 1.0, 1.1, 1.2, and USALS

Electronic Program Guide - EPG

Multilingual Menu

Time Shift (video pausing, rewinding)

PVR Ready - possibility to record on external USB drive

Blind Scan supported

Parental Lock for channels and Menu

Fast channels switching

Possibility of creating own channels lists

Possibility of creating Favourite Lists

Sort / Group / Channels search options

Channel Editing features -Remove, Lock, Skip, Move, Rename

Subtitle support - Teletext and DVB

Teletext support


Build-in Dolby Digital decoder (downmix to stereo)

Colour - black

OPTICUM USB HDD supported

Size (WxHxD) 280mm x 55mm x 235mm

Weight (netto) <2kg

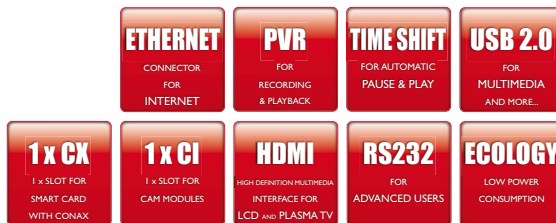

id: OX406P



519082521681952

Specifications are subject to change without notice.

REV:02 2012-01-10

