

**DVB-S**

Digital Satellite Receiver

**DVB-T**

Digital Terrestrial Receiver

## OPTICUM HD X110TS



Chipset ALI M3606

One slot for Smart Card in Conax system

One Slot for Common Interface Module

Support of SD / HD (MPEG2 / MPEG4 H.264), DVB-S, DVB-S2, DVB-T system

High resolution video output - HDMI

Standard resolution video output - SCART, RCA

Supported video resolutions - 576p, 720p, 1080i, 1080p

Front panel display - LED 4 digit

Digital audio output S/PDIF - coaxial

Analog audio output - RCA stereo

Software update by USB

0/12V out for connecting external devices

USB connector compliant with USB 2.0 standard

Low power consumption in Stand-by mode, below 1W

Automatic Stand-By mode after 3 hours from last using receiver for power saving

Compatible with DiSEqC 1.0, 1.1, 1.2, and USALS

Electronic Program Guide - EPG

Multilingual Menu, including English

Time Shift (video pausing, rewinding)

PVR Ready - possibility to record on external USB drive

Parental Lock for channels and Menu

Fast channels switching

Possibility of creating own channels lists

Possibility of creating Favorite Lists

Sort / Group / Channels search options

Channel Editing features - Remove, Lock, Skip, Move, Rename

Subtitle support - Teletext and DVB

Teletext support

OPTICUM USB HDD supported

**Size (WxHxD):** 265mm x 40mm x 165mm

**Weight (netto):** 0,95kg

**1 x CX**  
1 x SLOT FOR  
SMART CARD  
WITH CONAX

**1 x CI**  
1 x SLOT FOR  
CAM MODULES

**S/PDIF**  
DIGITAL AUDIO OUTPUT  
FOR  
HOME THEATER


**PVR**  
FOR  
RECORDING  
& PLAYBACK

**TIME SHIFT**  
FOR AUTOMATIC  
PAUSE & PLAY

**HDMI**  
HIGH DEFINITION MULTIMEDIA  
INTERFACE FOR  
LCD AND PLASMA TV

**USB 2.0**  
FOR  
MULTIMEDIA  
AND MORE...

**ECOLOGY**  
LOW POWER  
CONSUMPTION  
STANDBY <1W

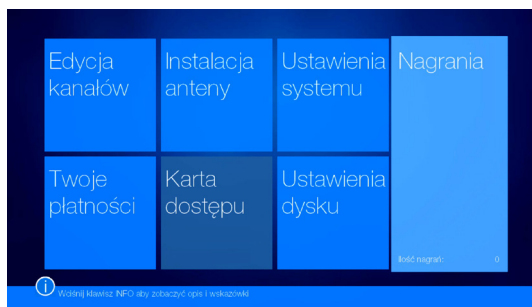

id: OHDX110TS



519082521682256

REV:01 SW

Specifications are subject to change without notice.

